


Spirit Wood Dye

- For colouring dense hardwoods such as mahogany and oak
- Ideal for colouring previously finished woods i.e. for antique restoration
- Easy to apply
- All colours are intermixable

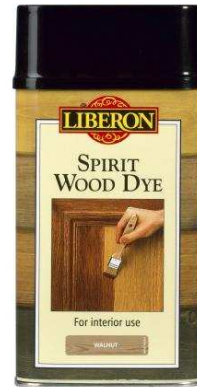

USAGE

Interior

COVERAGE

1 Litre

10-12 m²

APPLICATION

Brush or cloth

DRYING TIME

Minimum
6 hours

TOOL CLEANING

White Spirit

Product use

Liberon Spirit Wood Dye is ideal for use on hardwood and for furniture restoration - a traditional dye which penetrates deep into the wood. It can be mixed together to obtain intermediate shades.

Preparation

Ensure the surface is free from existing finishes, wax, oil or grease. Sand thoroughly to a smooth finish and remove the dust.

Application

Shake well before use. Apply liberally with a brush or clean cotton cloth, remove excess dye immediately with a clean cotton cloth, working with the grain wherever possible. For stronger colour apply a second coat after 4 hours.

When dry, it may be finished with French polish, water-based varnish or lacquer. Make sure you have sufficient dye to finish the work. If more than one tin is required, mix the contents together in a clean container to ensure uniform colour.

Important: Always test product on a spare or inconspicuous area for compatibility and end result. The colour bar may not be a true representation of the actual colour.

Precautions

Caution must be taken when using oil based finishes over Liberon Spirit Wood Dye. Keep brush strokes to a minimum as over brushing may lift out the colour.

Colours

Tudor Oak, Ebony, Light Oak, Golden Pine, Antique Pine, Walnut, Teak, Yew, Medium Oak, Dark Oak, Georgian Mahogany and Victorian Mahogany.

Packaging

Liberon Spirit Wood Dye is available in 250ml, 1L and 5L containers.

Health and Safety

Highly Flammable. Harmful to aquatic organisms, may cause long-term adverse effects in the aquatic environment. Keep out of the reach of children. Keep away from sources of ignition – No smoking. Do not empty into drains. Use only in well ventilated areas.

This product should be used in accordance with the manufacturer's instructions. Recommendations are for guidance only since conditions of use are completely beyond our control. For technical or practical information on this or other Liberon products please contact Liberon Technical Services on 01797 367555

Liberon Limited, Mountfield Industrial Estate, New Romney, Kent TN28 8XU.

Tel: 01797 367555 Fax: 01797 367575 www.liberon.co.uk

Liberon Ltd is a V33 Group Company.