


# Boiled Linseed oil

- Superior quality oil, similar to Raw Linseed, but has had hot air passed through to improve drying times
- Ideal for use with all types of wood (except exterior oak)
- Provides a traditional hard wearing finish
- Traditional sealer for terracotta and stone floors

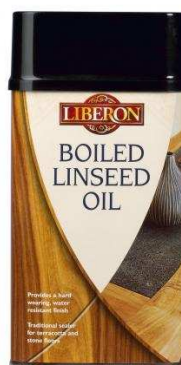

Safe for toys

## USAGE

Interior

## COVERAGE

1L

8-10 m<sup>2</sup>

## APPLICATION

Brush or cloth

## DRYING TIME

24h between coats – 4 days final

## TOOL CLEANING

White Spirit

Liberon Boiled Linseed Oil is used to give a mellow, patinated finish to new or stripped bare wood. A superior quality oil, similar to Raw Linseed, but having had hot air passed through to improve drying times, it is suitable for use on all types of wood, except exterior oak. It is also recommended as a sealer for terracotta tiles and other porous surfaces before waxing.

### Preparation

Ensure that the surface to be treated is clean and dry. Any previous finish must be thoroughly removed before using Boiled Linseed Oil.

### Application

Ready to use. For ease of application dilute the first few coats with Liberon Pure Turpentine (up to 30%).

Rub well into the wood using a lint free cotton cloth. After about 20 minutes, wipe off the excess with a clean lint-free cloth. Failure to do so will prevent penetration of future coats and leave a sticky surface. Repeat the previous steps once or twice at 24 hour intervals. Apply a final coat of Boiled Linseed Oil, again wiping off any excess. Allow this final coat to harden for a few days before use. A light rubbing in between coats with Liberon Ultra Fine Steel Wool (0000) will improve results. If the surface becomes damaged, work in a new coat.

**Important:** Oil finishes bring out the natural colours of timber. A wet surface will be an indication of the final colour. Always test product on a spare surface or inconspicuous area for colour, compatibility and end result.

### Cleaning and maintenance

Wipe surface with a damp cloth and buff dry. Re-oil as and when required depending upon usage.

### Precautions

- Store Liberon Boiled Linseed Oil at a temperature above 5 °C. Always replace the lid otherwise the oil can deteriorate.
- Oily cloths can self combust. Do not leave impregnated cloths in bundles. Before discarding lay them flat outside to dry to avoid a fire hazard.
- If the excess is not removed and the surface becomes sticky, wipe with white spirit to remove the sticky film and allow to dry before continuing.

### Packaging

Boiled Linseed Oil is available in 250ml, 500ml, 1L and 5L containers.

### Health and Safety

Keep out of the reach of children. Do not empty into drains. Use only in well-ventilated areas.

This product should be used in accordance with the manufacturer's instructions. Recommendations are for guidance only since conditions of use are completely beyond our control. For technical or practical information on this or other Liberon products please contact Liberon Technical Services on 01797 367555

Liberon Limited, Mountfield Industrial Estate, New Romney, Kent TN28 8XU.

Tel: 01797 367555 Fax: 01797 367575 [www.liberon.co.uk](http://www.liberon.co.uk) Liberon Ltd is a V33 Group Company.