

**Metolux®**




# Metolux

## 2 Part Styrene Free Wood Filler



Recommended with  All wood types. For staining.

 **NEW ECO FORMULATION**



**Description**

Metolux 2 Part Styrene Free Wood Filler is a pre-coloured two-part high strength polyester wood filler supplied in retail and trade pack sizes. Supplied with a separate hardener, this wood filler provides a strong high quality repair to wood imperfections. Supplied in a large range of pre-coloured blends to match your wood type.

**Key Benefits**


- Large trade pack sizes in a range of suitable colour matches.
- Professional Grade • Durable Repair • Paintable & Stainable
- Premium quality product for professionals. • Non slump for corner work.
- Accepts all finishes including all known paint systems and varnishes.
- Easy to sand down to perfection • Weatherproof for interior or exterior use.
- Attractive hard wearing printed tin packaging with dish lid for spreader.

**275ml**

**770ml**

**3.3L**

**Colour Range - All sizes available in 7 Stainable colour shades**

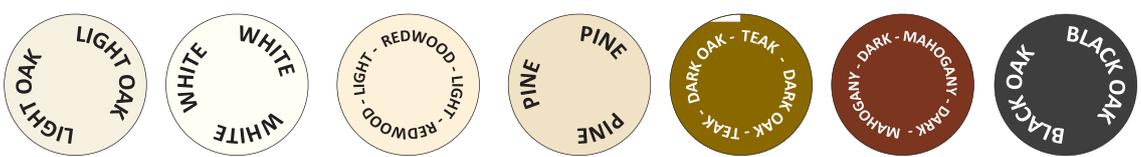

**SF**  
no styrene

Perfect for wood imperfections particularly corner work and deep holes up to 50mm such as wood knots.

**Metolux®**



**Metolux**

2 Part Styrene Free  
Wood Filler

### **Important**

The information and data given is based on our own experience, research and testing and is believed to be reliable and accurate. However, as Chemfix Products cannot know the varied uses to which its products may be applied, or the methods of application used, no warranty as to the fitness or suitability of its products is given or implied. It is the users responsibility to determine suitability of use. For further information please contact our Technical Department.

### **Preparation**

Prior to application, all surfaces should be clean, dry, sound and free from oil or grease. On old timber, any rotten or weak areas should be cut back to solid timber. Smooth areas should be slightly abraded to ensure a good key is obtained.

### **Mixing**

To mix the product simply add the hardener to the paste on a suitable board. Mixing should be carried out by spatula or stiff knife until a smooth, even coloured mix is obtained. Ensure that the filler is scraped clear of the mixing board at least once. This ensures that all the filler is mixed with the hardener and no uncured material will therefore be used.

The product should be mixed in the proportion of 50 parts base to 1 part hardener (a golf ball volume of base to 1.5 inch strip of hardener).

As this is a fast curing filler, it is recommended that only small quantities are mixed at a time - enough to be applied within 5 minutes of mixing.

### **Application**

Apply the product using a putty knife, spatula or similar direct to the area of timber to be repaired. Shape the product as required with a spreader or flat former. Leave enough excess proud of the surface to allow for sanding. For deep filling it may be necessary to build the product up in layers. plastic shuttering may also be used to produce a smooth straight edge but only remove when the filler has cured. Allow to cure before finishing. It is important that the total surface of the repair is fully sanded to ensure that the stain or finish can fully penetrate. Certain timbers are highly absorbent which may result in the filler being more noticeable. It is recommended that trials are conducted on an inconspicuous area prior to full scale production to ensure suitability.

### **Typical Gel Time**

The typical gelling time is around 10 minutes at 15 degrees temperature and is to full strength after just 30 minutes. The amount of hardener used, as well as the overall volume of material mixed and the ambient temperature will all affect gelling times.

### **Storage & Shelf**

This product should be stored between +5°C & +25°C.. The Shelf life of the product is 12 months from the manufacture date.